

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		P	REVISED PER ECO-11-005027	11MAR11	RK	HMR

D

C

B


A

D


C

B

A

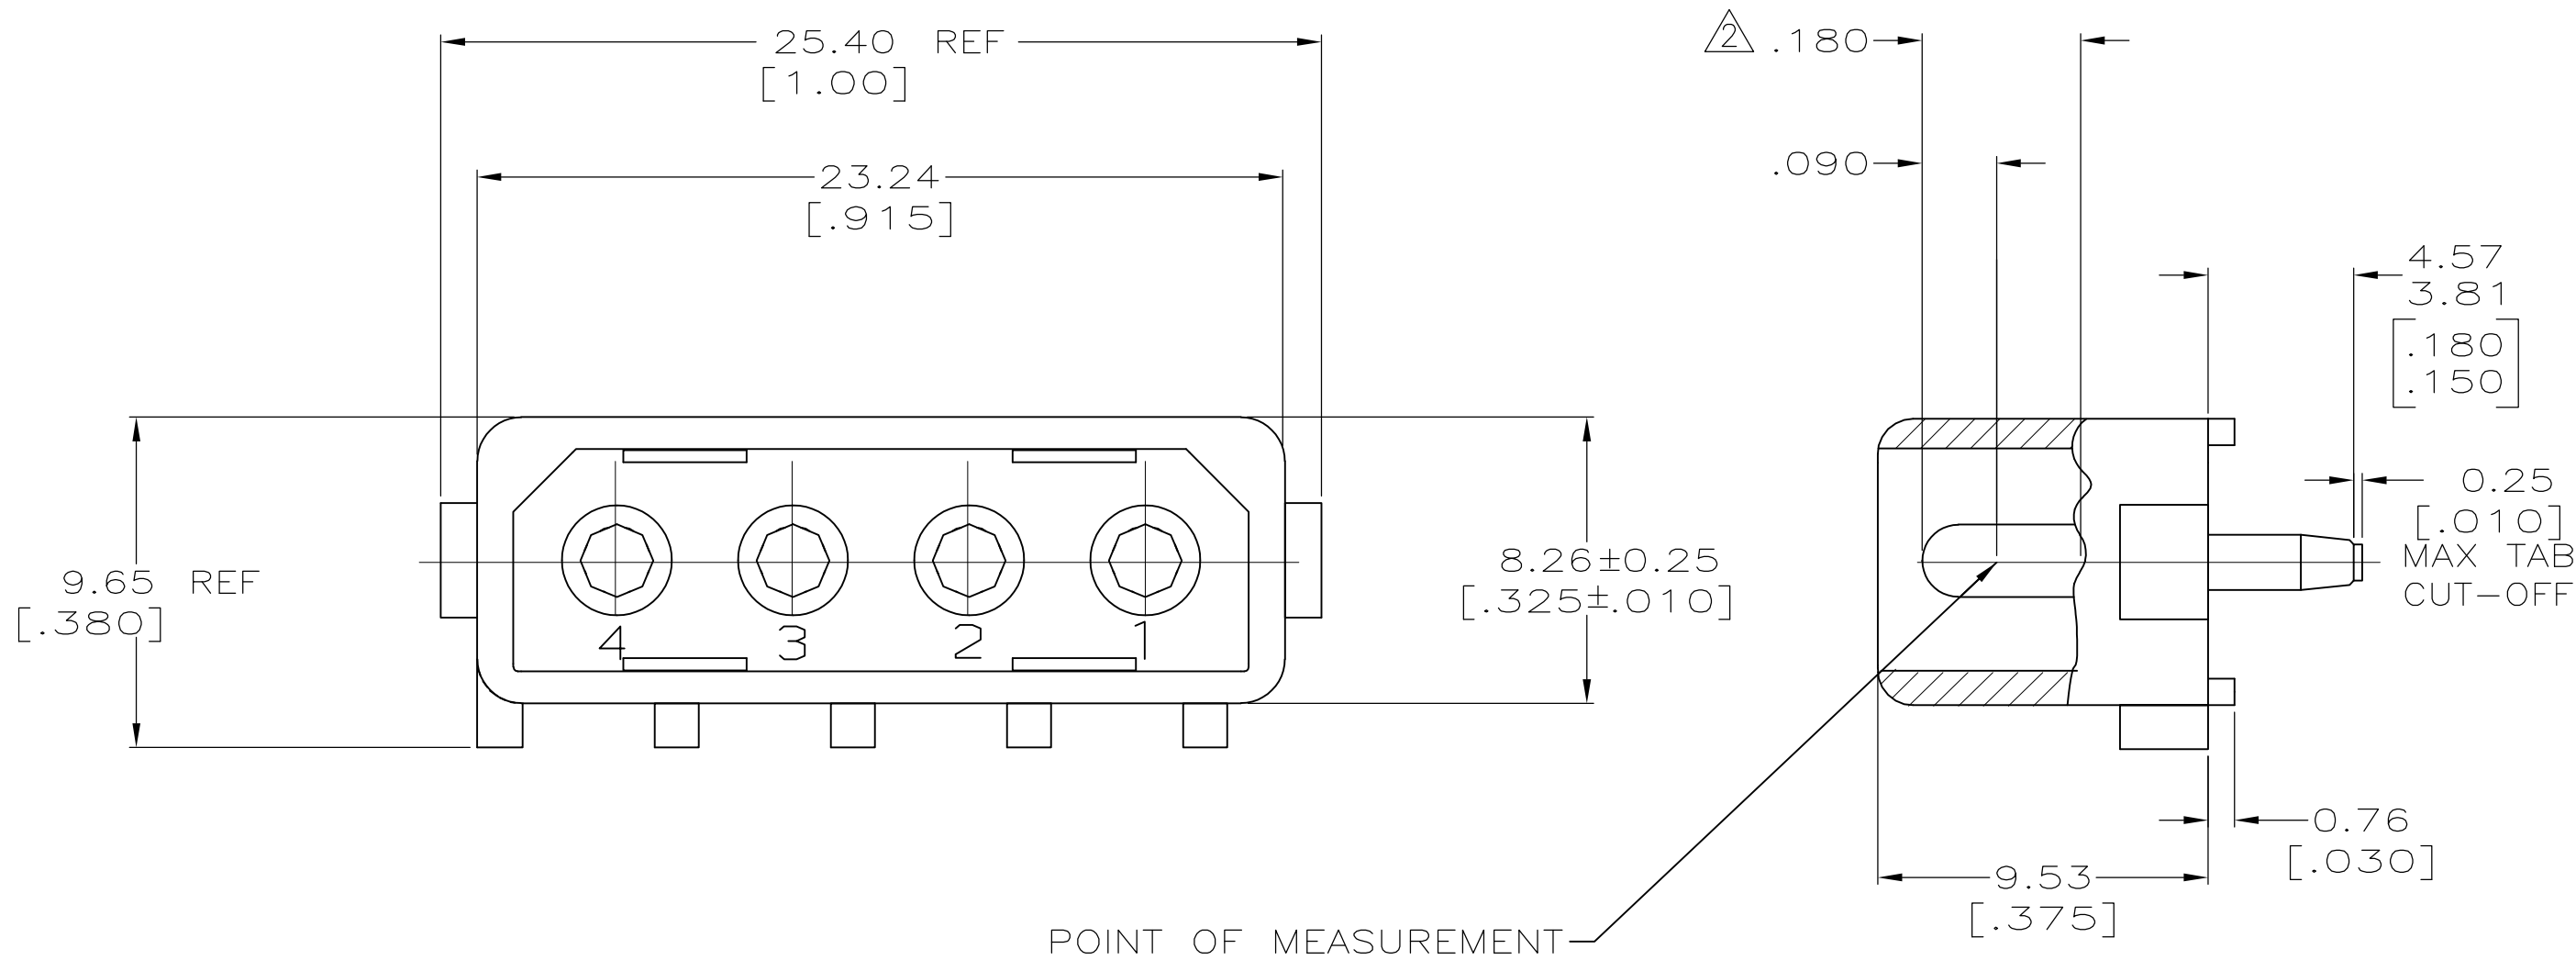

1. PARTS MUST COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.
- △ CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDERTAIL END.

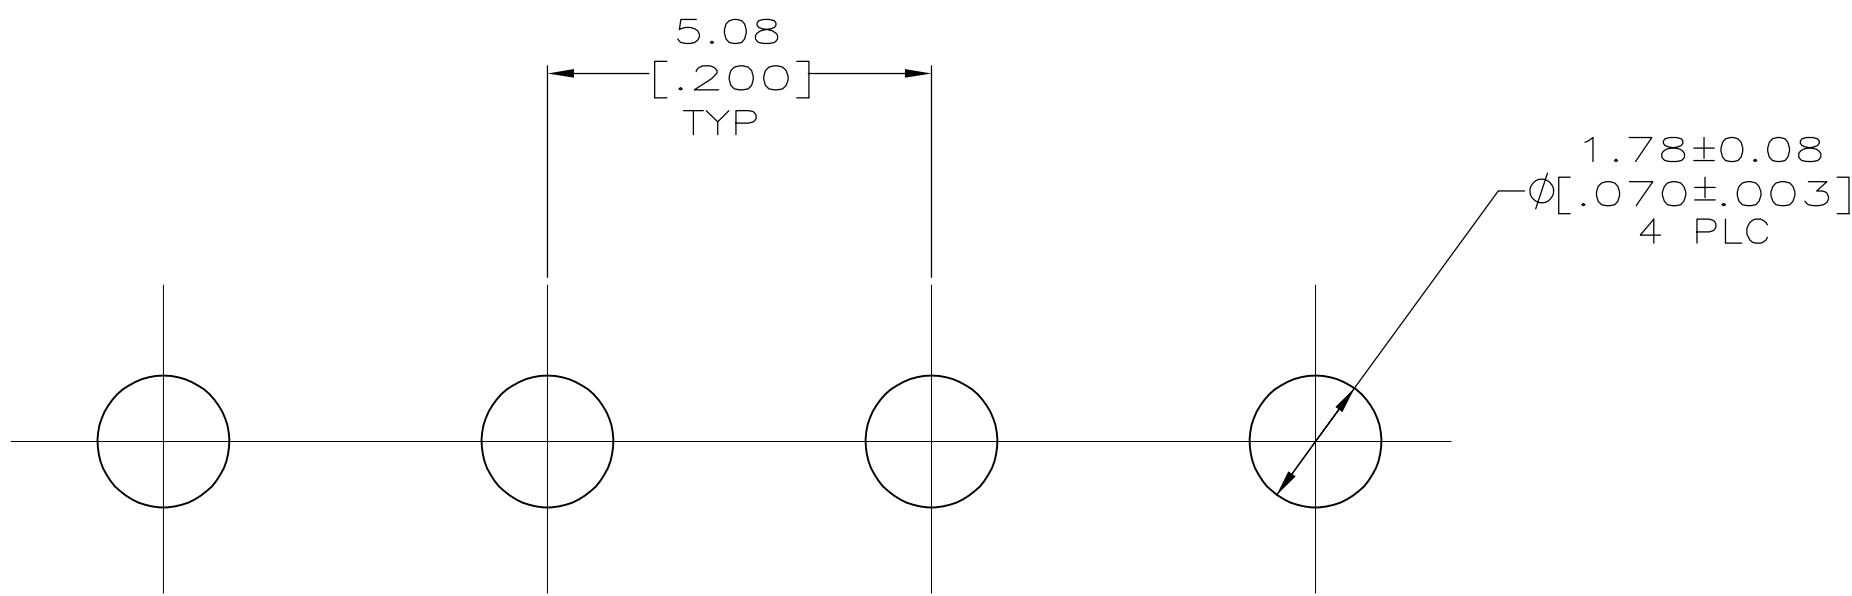

RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 [.062] THICK P.C. BOARD
SCALE 10:1

PHOS BRZ, TIN PLATED	NYLON,UL94V-2	1586515-3
△	NYLON,UL94V-2	1586515-2
PIN CONTACT MATERIAL & FINISH	HOUSING MATERIAL & COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 7/28/05	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK D. COLEY 7/28/05				
		APVD D. COLEY 7/28/05	NAME HEADER ASSEMBLY, 4 CIRCUIT, COMMERCIAL MATE-N-LOK(TM)			
		PRODUCT SPEC	-			
MATERIAL SEE TABLE		APPLICATION SPEC	-			
		WEIGHT	-			
FINISH SEE TABLE		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV P	